

# LIQUID STORAGE TANKS



[www.norwescocanada.com](http://www.norwescocanada.com)

1.888.474.7441



Norwesco is proud to be the world's largest manufacturer of molded poly tanks. For over 35 years, our customers have relied on Norwesco tanks for premium quality and reliability in performance.

Norwesco tanks are manufactured to strict quality guidelines to ensure years of high-performance use. Rugged, impact-resistant, one-piece seamless polyethylene construction make our tanks suitable for the storage and/or transport of most liquid chemicals. Norwesco tanks are manufactured using resins that meet FDA specifications to ensure safe storage of potable water. Norwesco tanks will be delivered to you with a fitting installed when applicable, but may also be ordered without a fitting.

Our goal is to make it easy and pleasant to do business with Norwesco. We consider our relationship with our customers to be our most valuable asset.



## VERTICAL STORAGE TANKS

Vertical storage tanks are most frequently used for bulk storage and static storage applications. Norwesco vertical tanks feature tie-down slots, built-in graduated gallon indicators, an offset fill-well and a self-vented, slosh-proof lid.



Part No.	Imperial Gallons	US Gallons	Diameter	Overall Height	Fill Opening	Outlet/Drain Specifications
41135	160 PW	190	29.5"	71"	8"	-
43201	200 PW	240	29.5"	91"	8"	-
41057	315 PW	380	35"	99"	16"	-
41061	500 PW	600	48"	84"	16"	-
41065	750 PW	900	48"	116"	16"	-
41067	800 PW	960	61"	83"	16"	-
41069	900 PW	1080	48"	148"	16"	-
44162	1000 PW	1200	72"	78"	16"	-
41219	1250 WO	1500	87"	66"	16"	2"
41221	1250 PW	1500	87"	66"	16"	2"
41225	1250 BL	1500	87"	66"	16"	2"
41223	1250 HD	1500	87"	66"	16"	2"
44225	1550 PW	1860	90"	76"	16"	2"
41215	1700 PW	2040	95"	75"	16"	2"
41217	1700 HD	2040	95"	75"	16"	2"
41931	1750 PW	2100	87"	89"	16"	2"
42035	1750 BL	2100	87"	89"	16"	2"
42036	1750 HD	2100	87"	89"	16"	2"
41258	2100 PW	2500	95"	89"	16"	2"
41260	2100 HD	2500	95"	89"	16"	2"
41262	2500 PW	3000	95"	107"	16"	2"
41264	2500 HD	3000	95"	107"	16"	2"
42824	4000 PW*	4800	120"	114"	16"	3"
42825	4000 HD*	4800	120"	114"	16"	3"
41971	5000 PW*	6000	120"	140"	16"	3"
41973	5000 HD*	6000	120"	140"	16"	3"
44087	8340 PW	10,000	141"	160"	16"	3"
44089	8340 HD	10,000	141"	160"	16"	3"

\*Built-in Lifting Lugs WO=Water Only PW=Premium Weight BL=Black HD=Heavy Duty

Tank dimensions and capacities may vary slightly and are subject to change without notice.

## HORIZONTAL LEG TANKS

With the broadest leg tank line available, Norwesco manufactures a size that will fit your needs. Used primarily for transport and nursing applications, Norwesco leg tanks feature molded-in legs that act as "baffles" to reduce sloshing.



Part No.	Imperial Gallons	US Gallons	Diameter	Overall Height	Length	Fill Opening	Outlet/Drain Specifications
41092	40	48	20"	23"	42"	5"	-
41939	55	65	23"	26"	43"	5"	3/4"
41183	80	96	23"	26"	59"	5"	-
41941	100	120	32"	35"	41"	8"	2"
41943	200	240	38"	41"	55"	8"	2"
41096	250	300	38"	41"	66"	16"	2"
41430	300	360	41"	43"	78"	16" & 5"	2" HD w/siphon
41229	425	510	49"	53"	71"	16"	2" HD w/siphon
41393	500	600	49"	53"	83"	16" & 5"	2" HD w/siphon

Optional Steel Bands available

## SPECIALTY WATER TRANSPORT TANKS

These tanks can be used for many applications. Used primarily for transport, they can also be used as stationary water storage tanks.



Part No.	Imperial Gallons	US Gallons	Width	Overall Height	Length	Fill Opening	Outlet/Drain Specifications
41123	90*	108	23"	28"	47"	5"	-
41124	180*	216	29"	35"	58"	5"	-
44332	250*	300	41.5"	31"	62.5"	8"	-
40993	730	876	55"	60"	93"	16"	2" HD w/siphon
42374	950	1140	73"	48"	105"	16"	2" HD w/siphon
42373	950 BL	1140	73"	48"	105"	16"	2" HD w/siphon
40994	1000	1200	55"	60"	125"	16"	2" HD w/siphon

\*Loaf Tank BL= Black

Tank dimensions and capacities may vary slightly and are subject to change without notice.



## ELLIPTICAL LEG TANKS

The elliptical tank style is designed to provide the greatest capacity with the lowest center of gravity, making it the best design available for transporting larger volumes.

Norwesco elliptical tanks feature molded-in legs that act as "baffles" to reduce sloshing and provide increased stability during transport. Norwesco elliptical leg tanks require full length bottom support as well as support bands.




Part No.	Imperial Gallons	US Gallons	Width	Overall Height	Length	Fill Opening	Outlet/Drain Specifications
44075	2220*	2664	88"	73"	142"	16"	3"
44077	2220 HD*	2664	88"	73"	142"	16"	3"
44091	2920*	3504	93"	79"	151"	16"	3"
44094	2920*	3504	93"	79"	151"	16"	3"

\*Require Full Length Support and Bands

## ELLIPTICAL LEG TANK BANDS

Part No.	Tank Size	A	B	C	No. of Bands Req.
63970	2220	66.5"	81"	89.5"	4
63982	2920	74"	88"	96"	4



## FLAT BOTTOM TANKS

Flat Bottom Tanks are designed to be the most rugged and durable utility transport tanks on the market. Unlike other tanks, Flat Bottom Tanks provide all the strength you need for transporting liquids without the use of bands. Tanks should be mounted on flat surfaces with full length and width support.



Part No.	Imperial Gallons	US Gallons	Width	Overall Height	Length	Fill Opening	Outlet/Drain Specifications
43157	1350	1600	80"	53"	126"	16"	2"
44427	2650	3180	92"	80"	145"	16"	3"
44430	2650HD	3180	92"	80"	145"	16"	3"

Tank dimensions and capacities may vary slightly and are subject to change without notice.



## BLACK VERTICAL WATER TANKS

Our water tanks are manufactured using resins that meet FDA specifications to ensure safe storage of potable water. The black color limits light penetration, which reduces the growth of waterborne algae. These tanks are rated at 10 pounds per Imperial gallon, which means that they are for **WATER STORAGE ONLY!** They should not be used for chemicals, fertilizers or any other product.



Part No.	Imperial Gallons	US Gallons	Diameter	Overall Height	Fill Opening	Top Fitting	Bottom Fitting
44517	500	600	48"	84"	16"	1.5"	2"
44518	800	960	48"	116"	16"	1.5"	2"
44519	1000	1200	72"	78"	16"	1.5"	2"
44533	1250	1500	87"	66"	16"	1.5"	2"
44520	1550	1860	90"	78"	16"	1.5"	2"
44521	1750	2100	87"	89"	16"	1.5"	2"
44522	2100	2520	95"	89"	16"	1.5"	2"
44523	2500	3000	95"	107"	16"	1.5"	2"
44524	5000	6000	120"	140"	16"	1.5"	2"
44525	8340	10000	141"	160"	16"	-	2"

## INDOOR FREESTANDING POTABLE WATER TANKS

These tanks have been specifically designed with residential and commercial applications in mind. The dimensions of the water tanks allow them to fit through a conventional doorway. The 230 and 350 come standard with a steel support frame. The design of the 330 and 500 imperial gallon tanks allows them to be freestanding/self-supporting and eliminates the need for a steel support frame.



Part No.	Imperial Gallons	US Gallons	Width	Overall Height	Length	Fill Opening	Outlet/Drain Specifications
41205	115	138	24"	60"	24"	16"	-
41199	230	276	24"	60"	48"	16"	-
41241	330	400	30"	68"	63"	16"	1-1/4"
41190	330	400	32.5"	83"	43"	16"	-
41015	350	420	29.5"	64"	61"	16"	-
44528	500	600	35"	83"	58"	16"	-

Tank dimensions and capacities may vary slightly and are subject to change without notice.





## PICKUP TRUCK TANKS

Designed to fit in the bed of full-size pickups as well as under a truck canopy, the 270 and 350 sizes have low profiles for better rear vision. They feature fill openings offset to the side of the tank for safety and easy access. A tough circular design adds strength. The 185 gallon tank fits both the "mini" pickups and full-sized models. Depending upon which way the tank is turned, the bottom width can be either 39" or 48". Our pickup truck tanks feature built-in, graduated gallon indicators and slosh-proof lids.

Part No.	Imperial Gallons	US Gallons	Top Width or Diameter	Bottom Width or Diameter	Overall Height	Fill Opening	Outlet/Drain Specifications
41213	185	222	60"/51"	48"/39"	30"	8"	2" w/siphon
40693	270	330	62"	49"	33"	8"	2" w/siphon
41227	350	420	65"	49"	39"	8"	2" w/siphon


## LOW PROFILE HOLDING TANKS

Low profile tanks are ideal for storage in areas where height is an important consideration. The low profiles are designed to fit under a cottage or cabin and the strong deep ribs create extra structural strength.



Part No.	Imperial Gallons	US Gallons	Width	Overall Height	Length	Fill Opening	Outlet/Drain Specifications
41188	160	192	46"	15"	80"	8"	-
41189	230	276	46"	20"	80"	8"	-
43123	500	600	72"	28.5"	98"	16"	2" HD w/siphon
42890	1075	1290	84"	36"	126"	16"	2" HD w/siphon
42891	1325	1590	84"	42"	126"	16"	2" HD w/siphon
44335	2100	2500	90"	51"	157"	16"	2" HD w/siphon

Tank dimensions and capacities may vary slightly and are subject to change without notice.

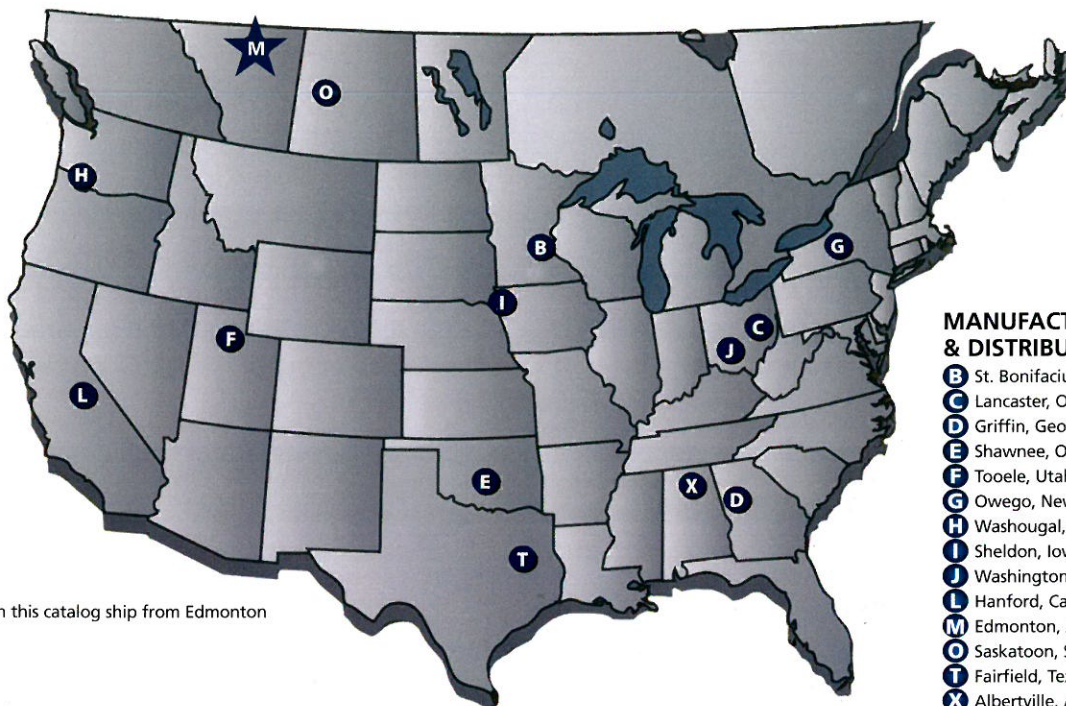

#### MANUFACTURING & DISTRIBUTION

- B** St. Bonifacius, Minnesota
- C** Lancaster, Ohio
- D** Griffin, Georgia
- E** Shawnee, Oklahoma
- F** Tooele, Utah
- G** Owego, New York
- H** Washougal, Washington
- I** Sheldon, Iowa
- J** Washington Court House, OH
- L** Hanford, California
- M** Edmonton, Alberta-Canada
- O** Saskatoon, Saskatchewan-Canada
- T** Fairfield, Texas
- X** Albertville, Alabama

★ All tanks in this catalog ship from Edmonton

## WARRANTY

Norwesco Canada Ltd. offers a 3 year warranty from date of manufacture on all premium weight tanks, water only tanks, and a 5 year warranty on all heavy weight tanks. Should a defect appear within the warranty period Norwesco Canada Ltd. will supply a new, equivalent tank in replacement thereof. Norwesco Canada Ltd.'s liability is limited to the value of the tank itself and specifically excludes the cost of installation and/or removal or consequential damages. Please contact your chemical supplier or Norwesco Canada Ltd.'s Customer Service for chemical resistance information.

LOCATION: 12015 - 152 STREET  
EDMONTON, AB T5V 1G4  
TOLL FREE: (888) 474.7441  
FAX: (780) 474.3454

[www.norwescocanada.com](http://www.norwescocanada.com)

Tank dimensions and capacities may vary slightly and are subject to change without notice.

©2015 Norwesco Canada Ltd. 2M0915